


T9E Series, DC Coil 30A PCB Relay

- 1 pole 30A, 1NO or 1CO contact
- High breaking capacity 7500 VA
- PCB and PCB/quick connect terminals
- UL class F insulation as standard
- Ambient temperature up to 105°C
- Plastic materials according to IEC60335-1

Typical applications

HVAC, power supplies, domestic appliances, measurement and control

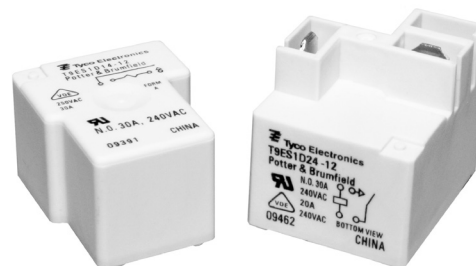

Approvals

VDE 40027903, UL E58304

Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO)	1 form C (CO)
Rated voltage	240VAC	
Max. switching voltage	250VAC (VDE); 300VAC (UL)	
Rated current	30A	20A/10A
Limiting continuous current	30A	
Breaking capacity max.	7500VA	5000/2500VA
Contact material	AgSnOInO (AgCdO optional)	
Min. recommended contact load	1A, 5VDC or 12VAC	
Initial contact resistance	75 mΩ at 1A at 5VDC or 12VAC	
Frequency of operation, with/without load	6/120min ⁻¹	
Operate/release time max., including bounce	15/15ms	

Contact ratings

Type	Contact	Load	Cycles
------	---------	------	--------

IEC 61810

AgSnOInO, 1W coil

1	NO	30A, 250VAC, cosφ=1, 60°C	20x10 ³
1	NO	20A, 250VAC, cosφ=1, 85°C	100x10 ³
2	NO	20A, 250VAC, cosφ=1, 70°C	100x10 ³
1, 2	CO	20A / 10A, 250VAC, cosφ=1, 60°C	20x10 ³

AgSnOInO, 900mW coil

1	NO	17A, 250VAC, cosφ=1, 105°C	100x10 ³
1	NO	20A, 250VAC, cosφ=1, 85°C	100x10 ³

EN 60730-1

AgSnOInO, 1W coil

1	NO	12(12)A, 240VAC, 60°C	100x10 ³
---	----	-----------------------	---------------------

UL 508 1)

AgSnOInO, 1W coil

1, 2	NO	30A, 240VAC, general purpose, 25°C	100x10 ³
------	----	------------------------------------	---------------------

AgSnOInO, 900mW coil

1, 2	NO	TV-8, 125VAC, 25°C	25x10 ³
------	----	--------------------	--------------------

1) Additional UL 508 ratings are available.

Mechanical endurance	10x10 ⁶ ops.
----------------------	-------------------------

Coil Data

Coil voltage range	6 to 110VDC
Max. coil power	110% of nominal
Max. coil temperature	155°C
Coil insulation system according UL	Class F

Coil Data (continued)


Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power W
Code D (1W) coil					
6	6	4.5	0.6	36	1
9	9	6.75	0.9	81	1
12	12	9	1.2	144	1
18	18	13.5	1.8	324	1
22	22	16.5	2.2	484	1
24	24	18	2.4	576	1
48	48	36.2	4.8	2304	1
110	110	82.5	11	12100	1
Code L (900W) coil					
6	6	4.5	0.6	40	.9
12	12	9	1.2	155	.9
24	24	18	2.4	660	.9

All figures are given for coil without preenergization, at ambient temperature +23°C.

Insulation Data

Initial dielectric strength	1500V _{rms}
between open contacts	2500V _{rms}
between contact and coil	
Initial surge withstand voltage	6kV (1.2μs/50μs impulse wave)
between contact and coil	
Initial insulation resistance	1x10 ⁹ Ω
between insulated elements	
Clearance/creepage	≥3mm/4mm
between contact and coil	

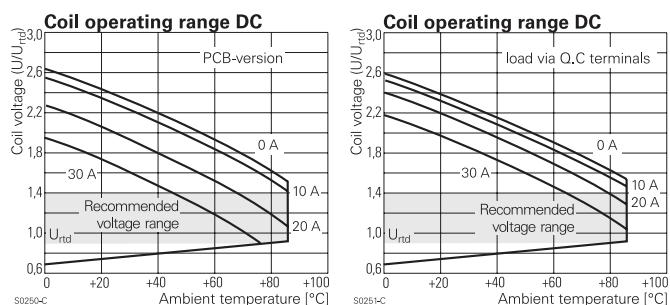

Coil operating ranges shown above are for 1W coils

T9E Series, DC Coil 30A PCB Relay (Continued)

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

Ambient temperature
DC coil -40°C to 85°C / 105°C

Category of environmental protection
IEC 61810 RTII - flux proof (T9EV)
RTIII - wash tight (T9ES)

Vibration resistance (functional) 1.5mm, 10-55 Hz
Shock resistance (functional) 10g for 11msec
Shock resistance (destructive) 100g

Other Data (Continued)


Terminal type pcb-tht and pcb-tht + quick connect
Weight 26g mounting code 1
33g mounting codes 2 and 5

Resistance to soldering heat THT
IEC 60068-2-20 260°C


Packaging/unit tray/50 pcs., box/250 pcs.

Dimensions

PCB version

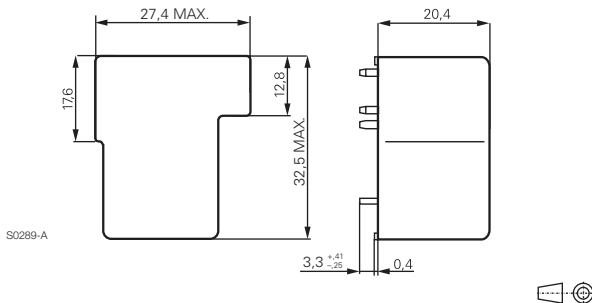


PCB/quick connect version

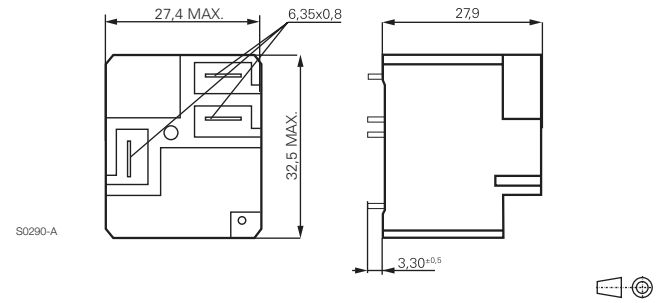


Terminal assignment

Bottom view on pins

1 Form A




1 Form C



PCB layout

Bottom view on pins


PCB version



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

S0261-AA

PCB/quick connect version



Only necessary terminals are present on single throw models. Consequently, some holes will be unnecessary for single throw models.

S0261-AH

T9E Series, DC Coil 30A PCB Relay (Continued)

Product code structure

Typical product code

T9E S 1 D 1 4 -24
Type
T9E Power PCB relay T9E

Enclosure
S Wash-tight plastic case with knock off nib
V Flux-proof plastic case

Contact arrangement
1 1 form A (1 NO) **5** 1 form C (1 CO)

Coil Input
D DC voltage, 1W **L** DC voltage, 900mW

Mounting and termination
1 PCB mounting; PCB terminals for coil and contacts
2 PCB mounting; PCB terminals for coil and contacts; 6.35mm (.250in) QC for contacts

Contact material
4 AgSnOInO
2 AgCdO – optionally available. Contact Product Engineering for availability and ratings.

Coil voltage

Coil code: please refer to coil versions table

Product Code	Enclosure	Mounting	Contact material	Contacts	Coil version	Coil voltage	Part number
T9ES1D14-12	wash tight	pcb terminals	AgSnOInO	1 form A, 1 NO	1W	12VDC	2027234-2
T9ES1D14-24						24VDC	2027234-7
T9ES1D14-48						48VDC	tba
T9ES1D24-12		pcb + quick connect				12VDC	2027234-8
T9ES1D24-24						24VDC	tba
T9ES1D24-48						48VDC	tba
T9ES5D14-12		pcb terminals		1 form C, 1 CO		12VDC	2027234-6
T9ES5D14-24						24VDC	tba
T9ES5D14-48						48VDC	tba
T9ES5D24-12		pcb + quick connect				12VDC	2027234-9
T9ES5D24-24						24VDC	tba
T9ES5D24-48						48VDC	tba